




SEAGAIN

SEAGAIN



PTS-LC

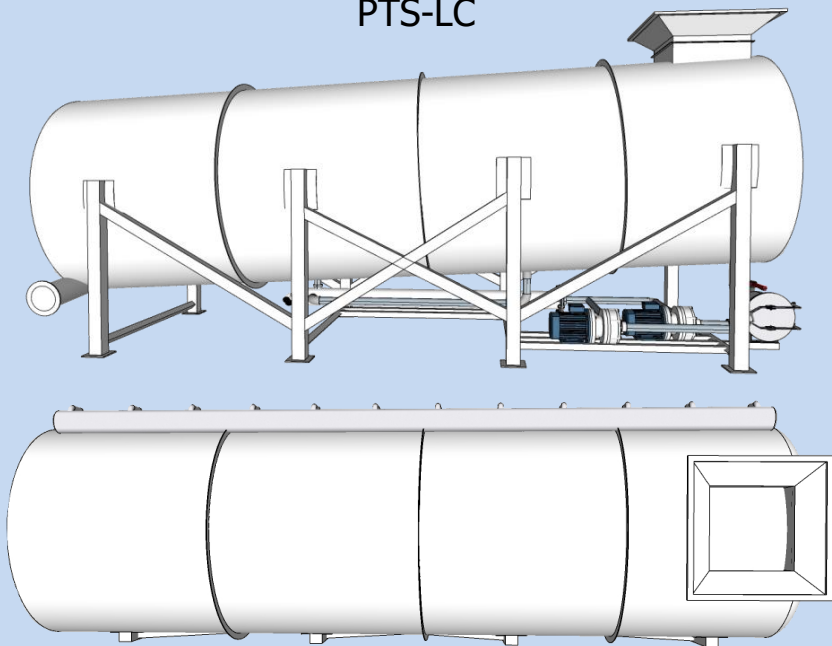

General Specifications

Model	Throughput kg/batch	Power Ca. kW	Volume m3	Size mm		
				L	W	H
PTS-LC2	2000	2,0	12	4800	1800	2800
PTS-LC5	5000	3,0	20	5500	2200	3400
PTS-LC10	10000	5,0	40	6600	2800	3900

The data provided is approximate and can change without further notice.
Other unit sizes (capacities) are available on request.

Seagain ApS Willemoesvej 2 DK-9850 Hirtshals Danmark
www.seagain.com tel. +45 4058 4638 tj@seagain.com

The Pelagic Thawing System

The new efficient solution for defrosting Pelagic fish



PTS-LC5 has a capacity up to 5 T/batch

Pelagic Thawing System

PTS-LC5 has capacity up to 5 T / batch

Tempering can be made while still packed on pallets or in crates.

The capacity depends on tempering degree, fish size, fat content, water temperature and running time.

PLC-control setting of parameters according to the required temperature on the outcoming fish.


Circulation of the thawing water is performed with an efficient water-flow program and temperature, securing all fish are equally thawed.

Battery setup allows for high capacity and continuous output.

Infeeding and discharging setup according to each factory process flow.

CIP (cleaning in place) is possible on request.

Battery of 2 pcs PTS-LC5

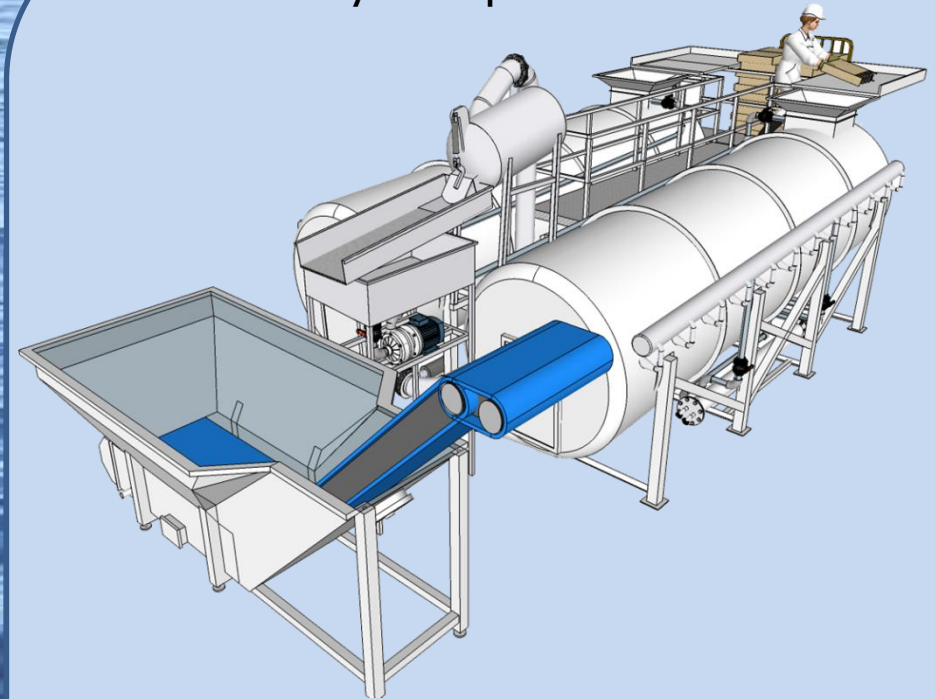

Battery of 6 pcs PTS-LC5

